

Technical specifications

55 CS

building dreams together



42CS 45CS 50CS **55CS** 57CS 62CS 67CS 72CS 85CS 52MC

building dreams together

Together we make boating ambitions a reality... so you can embrace your own personal dream. Working closely with owners, every single Contest yacht, both motor and sail, is designed and detailed to match individual desires. Together we begin with meticulous preparation, involving specialists and suppliers for every aspect and element. Founded in 1959, and with the stability of the third generation of the same boatbuilding family, we run our yard in Medemblik, Holland with a highly skilled team of accomplished, caring craftsmen to hand-build yachts from 42ft to 85ft (13m-26m). A Contest yacht brings pride in performance and confidence in the roughest of conditions. Together the ideal combination.


Exterior layout cockpit



55
CS



Interior layout

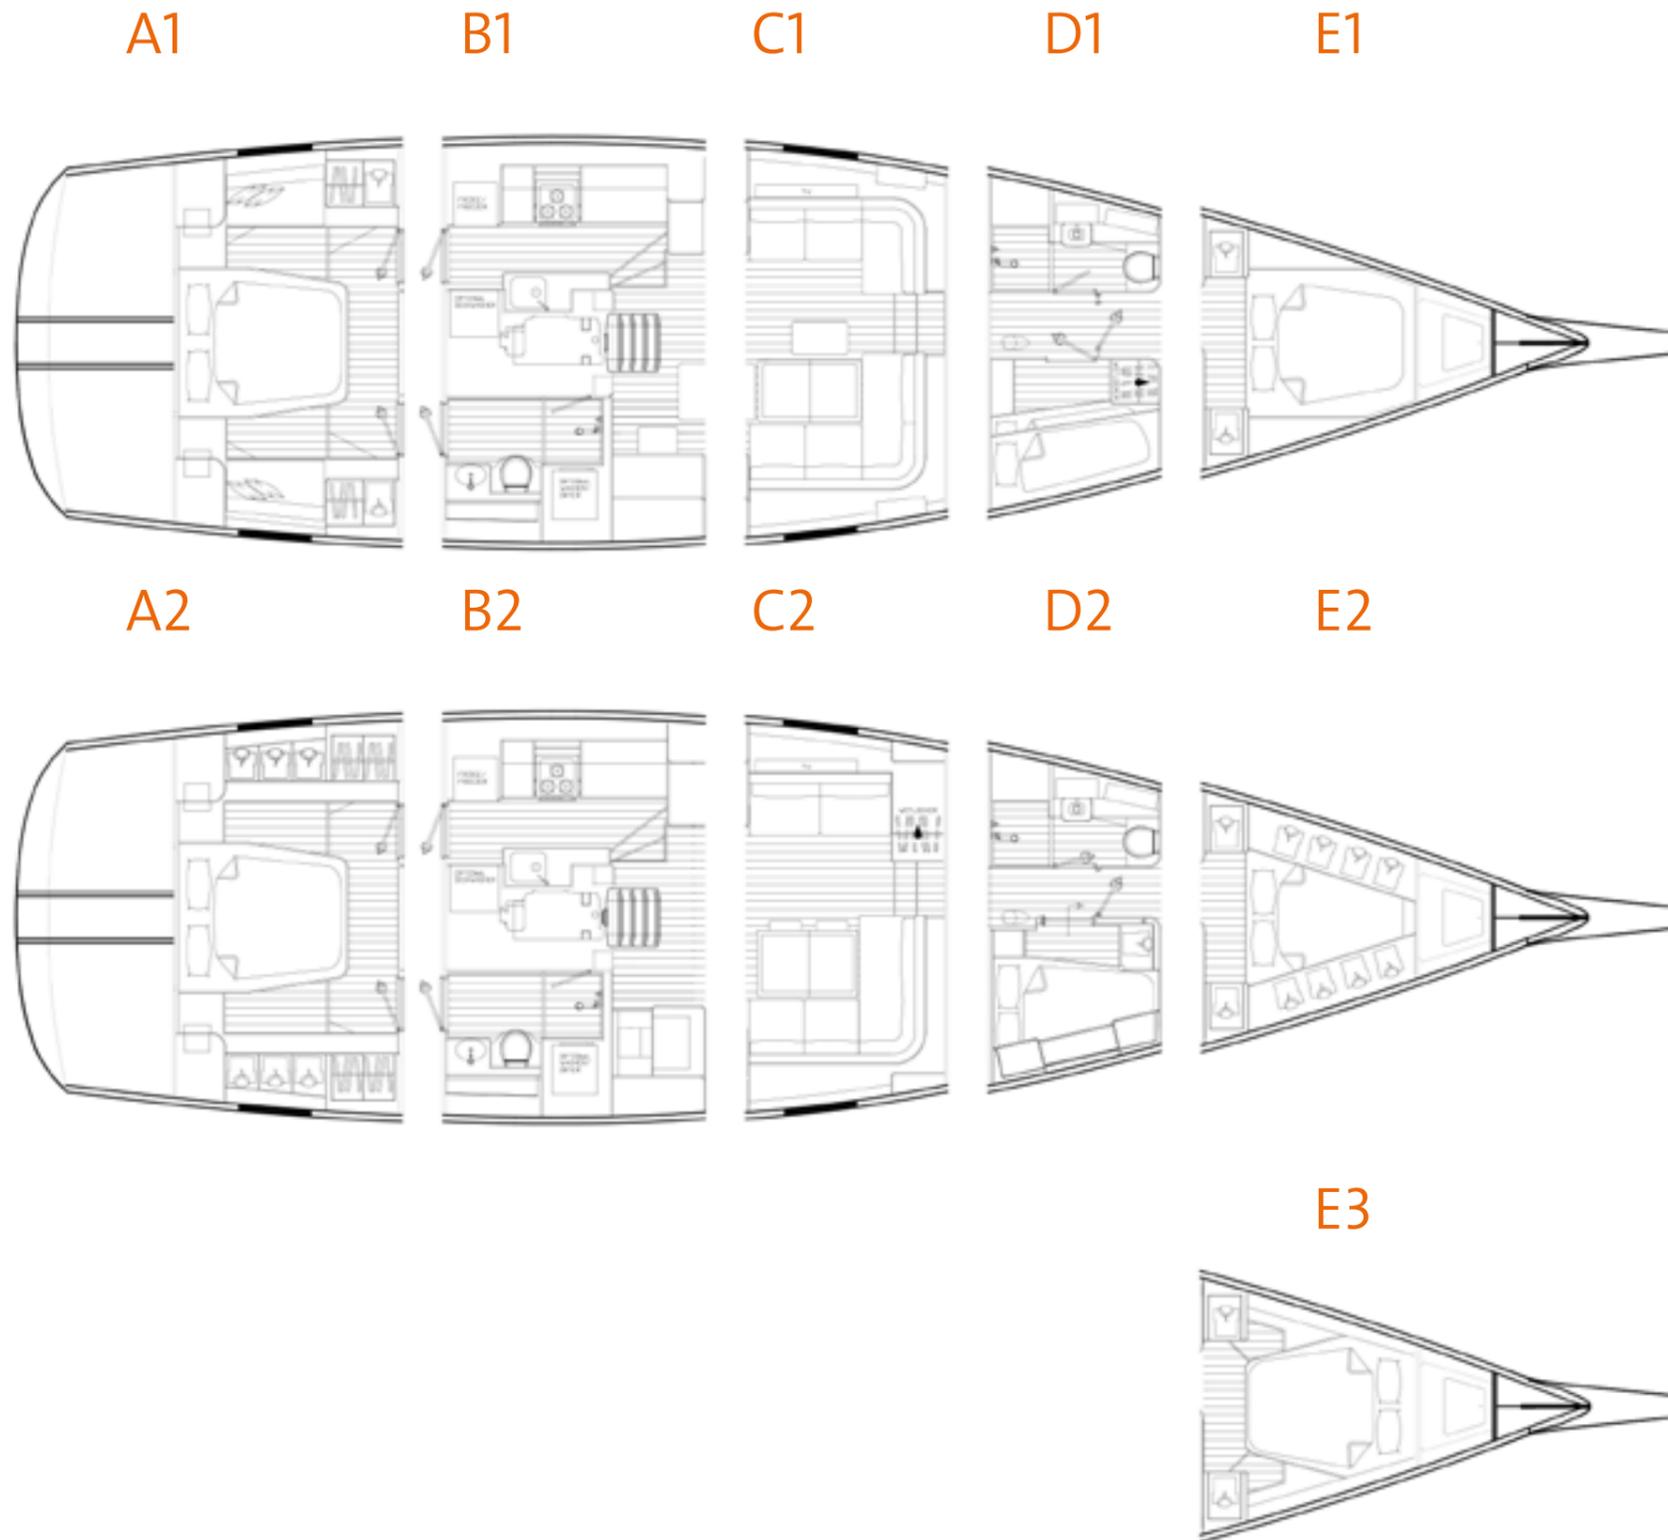

55
CS



carbon stiffening elements



1

Main dimensions

Specifications

Length overall	17m	55.77ft
Length including bowsprit	18.10m	59.38ft
Length waterline	15.83m	51.94ft
Maximum beam	5.02m	16.47ft
Displacement	24,960kg	55,027lb
Draft standard keel	2.55m	8.37ft
Mast height above waterline	24.82m	81.43ft
Main sail	92.75m ²	998ft ²
Genoa 106%	71m ²	767ft ²
Fuel tank	850ltr	187imp. gal.
Water tank	725ltr	159.5imp. gal.
Engine, Volvo Penta	110kW	150hp

2

Construction

2.1 General

Hull and deck are made of high quality materials. Several interior arrangements are available within the structural bulkheads and keel grid.

2.2 Hull

- ▶ Hull in sandwich, vacuum infused composite with the Conyplex vacuum infusion system®.
- ▶ Laminate consisting of quadraxial and biaxial E-glass for inner and outer skins, infused with vinylester resin.
- ▶ Local E-glass reinforcements.
- ▶ Solid laminate in structural areas like the keel area.
- ▶ First layer after gelcoat is a special barrier coat.
- ▶ Structural bulkheads fully bonded to hull and deck.
- ▶ One year warranty.
- ▶ Hull: gelcoat white.
- ▶ Stripe and waterlines: colour owner's choice.
- ▶ Antifouling: two layers.

2.3 Deck

- ▶ Deck in sandwich, vacuum infused composite with the Conyplex vacuum infusion system®.
- ▶ Deck: gelcoat white.
- ▶ Laminate consisting of quadraxial and biaxial E-glass for inner and outer skins.
- ▶ Local unidirectional E-glass reinforcements.
- ▶ Solid laminate in structural areas where deck equipment is fitted.
- ▶ Deck lockers and anchor locker in composite with gelcoat finish and teak covered deck hatches.
- ▶ Hand laid teak deck, toe rail, cockpit seats, cockpit floor and teak detailing around the cockpit.

2.4 Construction

- ▶ Vacuum infused composite structural bulkheads in sandwich, using the Conyplex vacuum infusion system®.
- ▶ Vacuum infused composite longitudinals in sandwich, using the Conyplex vacuum infusion system®.
- ▶ Carbon reinforced stiffeners.

2.5 Keel

- ▶ Performance keel with bulb in lead.
- ▶ Keel bolted through solid laminate using stainless steel bolts.
- ▶ Keel floors in sandwich, vacuum infused composite with the Conyplex vacuum infusion system®.

2.6 Rudder

- ▶ Fully balanced composite spade rudder.
- ▶ Fibre orientated rudder laminate (JEFA).
- ▶ Aluminium anodised rudderpost.
- ▶ JEFA rudder bearings.
- ▶ JEFA steering system.

3 Deck layout

3.1 Cockpit

- ▶ Large cockpit, suitable for eight people.
- ▶ Two helmsman positions.
- ▶ Fixed cockpit teak table with stainless steel 316 support.
- ▶ Winches and sheets situated within reach of helmsman position.
- ▶ Free walkway from aft deck to guest cockpit.
- ▶ Pad eyes for safety harnesses mounted in cockpit and at helmsman position.

3.2 Hatches and windows

- ▶ Four flush hull windows.
- ▶ Panoramic windows in saloon.
- ▶ Opening flush skylight hatches.
- ▶ Opening skylight hatch in coach roof.
- ▶ Opening port lights in cockpit.
- ▶ Flush teak covered deck hatches.

3.3 Deck hardware and equipment

- ▶ Stainless steel 316 stem head fitting.
- ▶ Stainless steel 316 guardrails 62cm high with two wires.
- ▶ Closed transom with electric bathing platform covered with teak in combination with a stainless steel 316 bathing ladder.
- ▶ Stainless steel 316 fillers.
- ▶ Stainless steel 316 handrails on cabin roof.
- ▶ Stainless steel 316 anti-chafe rails below mooring cleats.
- ▶ Stainless steel 316 mooring cleats; two cleats forward, two cleats amidships, two cleats aft and two fairleads on stern.
- ▶ Flagpole with stainless steel 316 support.
- ▶ Self-draining gas bottle locker in deck. Including one bottle with gas regulator valve. Extra space for second bottle in locker.
- ▶ Boat hook in aluminium stowed on lower shroud.
- ▶ Six fenders with socks and ropes.
- ▶ Four 20m 16mm mooring warps.
- ▶ Two 25m 18mm mooring warps.

3.4 Sailing hardware

- ▶ Deck fittings.
- ▶ Aluminium winches throughout.
- ▶ Central self-tailing mainsail winch.
- ▶ Two genoa winches.
- ▶ Two self-tailing halyard winches.
- ▶ Winch handles.
- ▶ Chain plate on deck for removable cutter stay.
- ▶ Preparation spipole track on standard mast.

3.5 Anchor system

- ▶ Integrated anchor launching system in bow.
- ▶ Electric anchor winch.
- ▶ 32kg Delta anchor with 70m galvanised 10mm anchor chain.
- ▶ Anchor chain marked each 10m.

3.6 Steering system

- ▶ Twin steering pedestals combined with stainless steel steering wheels with leather cover.
- ▶ Back-up steering system.
- ▶ Compass.

3.7 Hydraulics

- ▶ Hydraulic backstay tensioner.
- ▶ Hydraulic boom vang.
- ▶ Combined control panel in cockpit for boom vang and backstay.

4 Mast, rigging & sails

4.1 Mast

- ▶ Selden spars, keel stepped, sloop rigged with silver anodised finish.
- ▶ Swept back spreaders.
- ▶ Slab reefing system.
- ▶ Reefing lines led aft to the cockpit.
- ▶ Selden MDS Car system.
- ▶ LED navigation lights.
- ▶ Masthead light 3-colours with anchor light.
- ▶ Steamlight.
- ▶ Deck light.
- ▶ Boom light.
- ▶ Windex in mast top.

4.2 Rigging

- ▶ Standing rigging: Dyform rigging.
- ▶ Genoa manual furling system Furlax.
- ▶ Main sheet, winches situated within reach of the helmsman.
- ▶ Genoa sheets, winches situated within reach of the helmsman.

4.3 Sails

- ▶ Mainsail, fully battened, slab reefing by CY selected quality supplier.
- ▶ Lazy jacks and main sail cover.
- ▶ Furling genoa by CY selected quality supplier.

5 Interior

5.1 General

As with all Contest yachts the interior will be fully made at our own yard in Medemblik, with great attendance to flexibility and detailing.

5.2 Standard features

- ▶ Light oak joinery.
- ▶ Oak floor.
- ▶ Matt varnished.
- ▶ Chrome fittings throughout.
- ▶ Padded side panelling.
- ▶ Padded headbord in aft cabin.
- ▶ Diagonally sliding saloon table for easy access for comfortable lounging and dining.
- ▶ Two ottomans for occasional seating with release fitting for easy stowage while sailing.
- ▶ Shower stalls with thermostatic mixer.
- ▶ Doors with anti-rattle door locks.
- ▶ Corian worktops in galley.
- ▶ Corian tops in each head with washbasins.
- ▶ Design taps.
- ▶ Three burner cooker with oven and grill fitted on gimbals (stainless steel).
- ▶ Quality curtain blinds for portholes.
- ▶ Quality curtain blinds behind padded panels for hull windows.
- ▶ Roller blinds at all skylight hatches.
- ▶ Lee cloths in all berths.
- ▶ Overhead lights in all cabins.
- ▶ Dimmers on overhead lights in saloon.
- ▶ LED ceiling lights.
- ▶ Red navigation light above chart table.
- ▶ Reading lights on bulkhead owner's cabin.
- ▶ Careful noise reduction throughout.
- ▶ Engine room well insulated.
- ▶ Comfortable mattresses in all cabins.
- ▶ Waste bin in galley.
- ▶ Extensive mirrors in heads.

6.1 Engine

- ▶ Spacious engine room with easy access from side passage.
- ▶ Volvo Penta D3-150 110kW (150 hp) 3.000 rpm 5 cylinder turbo-charged diesel engine.
- ▶ Indirect cooling.
- ▶ Volvo Penta HS45AE hydraulic gearbox.
- ▶ Separate main switch to enable service batteries to be used as starter battery.
- ▶ Single lever gears throttle control on starboard steering pedestal.
- ▶ Engine panel fitted in cockpit including rev. counter, oil pressure- temperature- and charge alarm, start and stop buttons.
- ▶ Water cooled exhaust with water lock and water separator.
- ▶ Stainless steel propeller shaft with thrust bearing and flexible coupling.
- ▶ Stern tube with water lubricated bearings and water seal.
- ▶ P-bracket propeller shaft.
- ▶ Three bladed propeller in bronze.
- ▶ Engine room insulated with combined drone- and sound absorbing insulation.
- ▶ Engine room ventilation by double electric ventilators and natural ventilation grills.
- ▶ Automatic engine room fire extinguish system.

6.2 Fuel system

- ▶ Fuel tank capacity 850 litres.
- ▶ Water suction point on fuel tank with separate drain pump..
- ▶ Fuel filter with water separator. Acoustic and visual "water in fuel" alarm.
- ▶ Diesel tank level gauge on touch screen.

6.3 Fresh water system

- ▶ Water tank capacity 725 litres.
- ▶ Pressurized hot & cold water system.
- ▶ Water heater 40 litres with heat exchanger to engine and 750 W immersion heating element.
- ▶ Thermostat taps in galley and heads.
- ▶ Water tank level gauge on touchscreen.

6.4 Bilge system

- ▶ Electric bilge pump in keel sump, with automatic switch.
- ▶ Manual bilge pump in engine room.
- ▶ Electric bilge pump in lazarette with automatic switch.
- ▶ Grey water pump equipped with flexible hose for water discharge in any compartment.
- ▶ Combined discharge in engine room to reduce number of through hull fittings.

6.5 Black and grey water system

- ▶ Two manual flush seawater toilets.
- ▶ Separate black water system in front and aft ship.
- ▶ Indicator on black water tank indicating full or empty.
- ▶ Shower stalls with automatic drain.
- ▶ Separate grey water system in front and aft ship.

6.6 Refrigeration system

- ▶ Refrigerator in stainless steel with front door.

6.7 Ventilation system

- ▶ Forced ventilation system in engine room.

6.8 Safety equipment

- ▶ Gas valve manual.
- ▶ Three foam fire extinguishers 2kg.
- ▶ Fire blanket.
- ▶ Automatic fire extinguish system in engine room.
- ▶ Smoke detection.

7.1 AC/DC systems

- ▶ 24 VDC and 230 VAC system on board.
- ▶ Dedicated technical area (electrical room) for switches and fuses.
- ▶ Standard energy pack:
 - ▶ Service batteries 400 Ah | 24 VDC
 - ▶ Start battery engine 50 Ah | 12 VDC
 - ▶ Battery charger start battery 25 A | 12 VDC
 - ▶ Monitoring display batteries
 - ▶ Alternator 150 A | 12 VDC start battery engine group
 - ▶ Second alternator 75 A | 24 VDC service battery group
 - ▶ 230V - 50 Hz shore power connection:
 - ▶ Shore power isolation transformer 3,5 kW | 16 A
 - ▶ Shore power socket for 230 VAC | 50 Hz shore power
 - ▶ Cable 25m with 3-pole CEE 16 A connector
- ▶ 230V socket in each cabin/compartment.
- ▶ Emergency engine start on service batteries.
- ▶ All sea cocks under waterline are grounded.

7.2 Main switch panel

- ▶ All main switches situated at the touchscreen.
- ▶ All navigation lights with control LED's operated from the touchscreen.
- ▶ Tank level gauges situated at the touchscreen.
- ▶ Tank level gauges situated in the touchscreen.
- ▶ Alarms for:
 - ▶ Water in boat
 - ▶ Fire in engine room
 - ▶ Water in fuel
 - ▶ Battery level
 - ▶ Black water tanks
- ▶ Switch for navigation lights on engine/sailing/anchoring.

Owners manual

Certification

- ▶ The boat is CE certificated category A (unlimited ocean voyages).
- ▶ Lloyd's certificate on hull.

Options

AMOUNTS IN EURO'S (EXCL. VAT)

Hull and keel

<input type="checkbox"/> Integrated A-frame / bowsprit (including Gennaker & Code o tack)	std
<input type="checkbox"/> Hull painted in Alexseal including double waterline and striping	25.432
<input type="checkbox"/> Underwater hull lights LED white 2x garage	4.803
<input type="checkbox"/> Epoxy treatment (international) under waterline	10.360

Mast and rigging

<input type="checkbox"/> Selden furling mast aluminium <i>hydraulic</i>	49.136
<input type="checkbox"/> Genoa furling system <i>hydraulic</i>	21.281
<input type="checkbox"/> Cutter sail furling system fixed <i>hydraulic</i>	15.281
<input type="checkbox"/> Combined control panel in cockpit for hydraulic vang and backstay	std

Mast accessoires

<input type="checkbox"/> Active radarreflector	2.408
<input type="checkbox"/> Spreader lights LED down on lowest spreaders for Selden	3.830
<input type="checkbox"/> Electric winch on mast SB Selden	7.939
<input type="checkbox"/> Electric winch on mast PS Selden	7.331

Sails (by North Sails)

<input type="checkbox"/> Mainsail fulbatten NPL Tour UltraX white	24.616
<input type="checkbox"/> Mainsail inmast furling NPL Tour UltraX white	20.387
<input type="checkbox"/> Mainsail inboom NPL Tour UltraX white	24.612
<input type="checkbox"/> Furling genoa NPL Tour UltraX white	12.451
<input type="checkbox"/> Cuttersail furling (removable) setup: furler, halyard, stopper, blocks & sheets	11.211
<input type="checkbox"/> Cuttersail furling NPL Tour UltraX white	7.794
<input type="checkbox"/> Gennaker G2 (including halyard, sheets, tack, blocks & chute)	19.625

Upholstery and interior

<input type="checkbox"/> Teak interior instead of white washed oak	14.828
<input type="checkbox"/> Interior layout A1 standard	std
<input type="checkbox"/> Interior layout A2 full storage	3.820
<input type="checkbox"/> Interior layout B1 standard	std
<input type="checkbox"/> Interior layout B2 forward facing PS navigation station	4.680
<input type="checkbox"/> Interior layout C1 standard	std
<input type="checkbox"/> Interior layout C2 wetlocker including side cupboards & ottoman's	9.870
<input type="checkbox"/> Interior layout D1 bunk beds including wetlocker	std
<input type="checkbox"/> Interior layout D2 double bed with sliding door	3.460
<input type="checkbox"/> Interior layout E1 standard	std
<input type="checkbox"/> Interior layout E2 overhead lockers	4.890
<input type="checkbox"/> Interior layout E3 island bed	3.240
<input type="checkbox"/> Cockpit cushions with backrest	5.290
<input type="checkbox"/> Carpet throughout	2.730
<input type="checkbox"/> Roller blinds at all skylight hatches	std
<input type="checkbox"/> Lee cloth in all berths	std

Multimedia

<input type="checkbox"/> Fusion Radio (AM/FM/CD/Bluetooth) with two speakers in saloon	2.094
<input type="checkbox"/> Fusion radio cockpit zone (connected to unit in saloon)	626
<input type="checkbox"/> Television LED 40" PS on lift	3.248
<input type="checkbox"/> Television LED 40" owner's cabin	1.807

Technical accessoires

<input type="checkbox"/> Double fuel filter instead of standard	1.151
<input type="checkbox"/> Propeller Bruntons Varifold	5.584
<input type="checkbox"/> Bow thruster upgrade to 13hp retractable	13.960
<input type="checkbox"/> Deck wash pump sea & fresh water (midships)	1.441
<input type="checkbox"/> Foghorn air	1.697

Housekeeping equipment

<input type="checkbox"/> Force 10 4 burner with oven and grill	1.980
<input type="checkbox"/> Force 10 3 burner electric cooker with oven and grill	4.958
<input type="checkbox"/> Cooker hood with extractor fan	2.298
<input type="checkbox"/> Microwave stainless steel	2.931
<input type="checkbox"/> Washing machine	3.296
<input type="checkbox"/> Wash dryer machine	4.265
<input type="checkbox"/> Dishwasher (drawer)	3.666
<input type="checkbox"/> Foot pump fresh water in galley	538
<input type="checkbox"/> Front loaded fridge	std
<input type="checkbox"/> Extra top loaded freezer 53 litres	3.832
<input type="checkbox"/> Extra top loaded fridge/freezer 41 litres	3.144
<input type="checkbox"/> Freezer below stainless fridge	2.860
<input type="checkbox"/> Fridge in cockpit	4.820
<input type="checkbox"/> 1,5 sink in galley	380

Sanitary / climate control

<input type="checkbox"/> Climate control system throughout (Webasto)	29.776
<input type="checkbox"/> Climate control heater additional to climate control system (Webasto)	6.253
<input type="checkbox"/> Heating system throughout (Webasto)	22.048
<input type="checkbox"/> Dorade ventilation flush (1)	2.254
<input type="checkbox"/> Toilet aft head SB electrical, seawater	2.315
<input type="checkbox"/> Toilet front head electrical, seawater	2.315
<input type="checkbox"/> Hot & cold shower at stern	997
<input type="checkbox"/> Watermaker preparation Spectra	542

Deck accessoires

<input type="checkbox"/> Sprayhood with folding stainless frame and flush cover	3.399
<input type="checkbox"/> Bimini top lounge cockpit and helmsman cockpit	7.825
<input type="checkbox"/> Cover for saloon windows (screen cloth outside)	910
<input type="checkbox"/> Carbon fibre steering wheels	3.280
<input type="checkbox"/> Window (60 x 60cm) in bimini with cover	230
<input type="checkbox"/> Cockpit table varnished	2.170
<input type="checkbox"/> Glass/can holder on pedestal	308

Deck equipment (Lewmar)

<input type="checkbox"/> 1x winch main sheet (<i>electric stainless</i>)	4.870
<input type="checkbox"/> 2x winch genoa sheet (<i>electric aluminium</i>)	5.223
<input type="checkbox"/> 2x winch genoa sheet (<i>electric stainless</i>)	5.676
<input type="checkbox"/> 2x winch multi purpose (<i>manual stainless</i>)	4.707
<input type="checkbox"/> Anchor chain remote control on pedestal	1.395
<input type="checkbox"/> Dinghy garage including hydraulic bathing platform and sliding strips	16.870
<input type="checkbox"/> Gangway carbon GS composite 2m (including trapeze, fitting and bag)	2.822
<input type="checkbox"/> Gangway hydraulic	28.228
<input type="checkbox"/> Folding seats with stainless support in pushpit	2.275
<input type="checkbox"/> Gates in guardrails (port and starboard side)	640

Safety and rescue

<input type="checkbox"/> Gas valve electric	520
<input type="checkbox"/> Fire extinguish system engine room	std

Energypack Contest

<input type="checkbox"/> Energypack Europe (230 VAC - 50 Hz)	20.418
- Service batteries upgrade to 600 Ah 24 VDC	
- Bow thruster batteries 150 Ah 24 VDC	
- Combined inverter/charger 3.500 W (230 VAC 50 Hz) - 100 A 24 VDC	
- Bow thruster battery charger 20 A 24 VDC	
- Isolation transformer 230 VAC 50 Hz 32 A	
- 5x sockets 230 VAC 50 Hz	
<input type="checkbox"/> Energypack Europe (230 VAC - 50 Hz) incl. generator	36.074
- Service batteries upgrade to 600 Ah 24 VDC	
- Bow thruster batteries 150 Ah 24 VDC	
- Combined inverter/charger 3.500 W (230 VAC 50 Hz) - 100 A 24 VDC	
- Bow thruster battery charger 20 A 24 VDC	
- Isolation transformer 230 VAC 50 Hz 32 A	
- Generator 6.4 kW 230 VAC 50 Hz	
- 5x sockets 230 VAC 50 Hz	
<input type="checkbox"/> Upgrade to 50/60 Hz shore power (230 VAC)	8.543
- Isolation transformer 230 VAC 50/60 Hz 16A	
- Additional service batteries charger 110 A 12 VDC (for 60 Hz shore power)	
- Selection switch to supply ship with either 50 or 60 Hz	

THE INFORMATION CONTAINED IN THIS SPECIFICATION IS SUBJECT TO CHANGE WITHOUT PRIOR NOTIFICATION. EXTRA EQUIPMENT MAY INFLUENCE THE STANDARD SPECIFICATION. #CONTEST YACHTS, JANUARY 2020/01

Basepack Raymarine i70s		
<input type="checkbox"/> Raymarine i70s Basepack	19.314	<input type="checkbox"/> Navtex ICS Nav 6a with dedicated antenna on spreader
- Raymarine i70s multifunction instrument (3x above entrance)		
- Raymarine i70s multifunction instrument (pedestal)		
- Raymarine i70s autopilot controller (fitted on pedestal)		
- Raymarine EV1 sensor core compass		
- Raymarine ACU-400 autopilot computer		
- Electric rotary pilot drive		
- Raymarine DTS800 depth, speed and temperature sensor		
- Raymarine wind sensor		
- Raymarine RS150 GPS		
- Technical explanation by Raymarine		
Navionics		
<input type="checkbox"/> Chart Navionics Platinum XL3	372	
<input type="checkbox"/> Chart Navionics Plus XLg	241	
Antenna		
<input type="checkbox"/> AIS transceiver (Class-B) Raymarine incl. antenna on spreader PS	2.252	
<input type="checkbox"/> Antenna VHF FM/AM	1.263	
<input type="checkbox"/> 4G router including on board WIFI network	3.497	
<input type="checkbox"/> Antenna Glomex DVB-T	1.057	
<input type="checkbox"/> Satellite TV KVH TracVision TV6 (mounted on pushpit)	14.749	
VHF		
<input type="checkbox"/> VHF radio Raymarine Ray90 (DSC class "D"), 1 station (outside)	2.227	
<input type="checkbox"/> VHF radio Raymarine Ray90 (DSC class "D"), 2 stations	3.369	
<input type="checkbox"/> Loud hailer Raymarine	756	
Communication		
<input type="checkbox"/> KVH TracPhone FleetBroadband 250 (front on mast)	18.577	
<input type="checkbox"/> KVH TracPhone V3-IP (front on mast)	25.222	
<input type="checkbox"/> SSB transceiver ICOM	12.709	
<input type="checkbox"/> SSB transceiver ICOM - preparations	4.277	
Interfaces		
<input type="checkbox"/> Marine computer at navigation station	4.385	
<input type="checkbox"/> USB connection on NMEA 2000 network (Raymarine)	556	
<input type="checkbox"/> NMEA 2000 engine data interface Volvo (Raymarine)	1.152	
Navtex/Meteo		
<input type="checkbox"/> Navtex ICS Nav 6a with dedicated antenna on spreader	2.665	
Plotter cockpit		
<input type="checkbox"/> Plotter Raymarine AXICOM PRO 9" - next to entrance	5.377	
<input type="checkbox"/> Plotter Raymarine AXICOM PRO 12" - next to entrance	6.530	
<input type="checkbox"/> Plotter Raymarine AXICOM PRO 9" - 2x pedestal	8.590	
<input type="checkbox"/> Plotter Raymarine AXICOM PRO 12" - 2x pedestal	9.740	
Plotter Navigation Station		
<input type="checkbox"/> Plotter Raymarine AXICOM PRO 9" - navigation station	4.627	
<input type="checkbox"/> Plotter Raymarine AXICOM PRO 12" - navigation station	5.780	
Radar		
<input type="checkbox"/> Raymarine Quantum™ CHIRP radar with Doppler	4.627	
Cameras		
<input type="checkbox"/> Fixed camera engine room (Raymarine system)	2.929	
Fishfinders		
<input type="checkbox"/> Fishfinder Raymarine CHIRP	3.134	
Raymarine Expansion Units		
<input type="checkbox"/> Wireless Pilot controller (Raymarine)	1.247	
<input type="checkbox"/> Raymarine i70s multifunction instrument display	921	

The Contest Range



MAIN DIMENSIONS 42CS

Length overall	12.85m	42.15ft
Length waterline	11.76m	38.63ft
Maximum beam	4.15m	13.61ft
Displacement	11,000kg	24,251lb



MAIN DIMENSIONS 45CS

Length overall	13.70m	44.9ft
Length waterline	11.64m	38.19ft
Maximum beam	4.10m	13.3ft
Displacement	13,500kg	27,760lb



MAIN DIMENSIONS 50CS

Length overall	14.99m	49.18ft
Length waterline	13.13m	43.08ft
Maximum beam	4.58m	15.03ft
Displacement	17,500kg	38,580lb



MAIN DIMENSIONS 55CS

Length overall	17.00m	55.77ft
Length waterline	15.83m	51.94ft
Maximum beam	5.02m	16.47ft
Displacement	24,960kg	55,027lb



MAIN DIMENSIONS 57CS

Length overall	17.23m	56.5ft
Length waterline	15.55m	51.0ft
Maximum beam	5.12m	16.8ft
Displacement	27,900kg	61,508lb



MAIN DIMENSIONS 62CS

Length overall	19.18m	63.9ft
Length waterline	16.80m	55.1ft
Maximum beam	5.45m	17.9ft
Displacement	31,000kg	68,563lb



MAIN DIMENSIONS 67CS

Length overall	20.37m	66.81ft
Length waterline	18.50m	60.83ft
Maximum beam	5.65m	18.5ft
Displacement	39,500kg	87,081lb



MAIN DIMENSIONS 72CS

Length overall	21.80m	71.5ft
Length waterline	18.99m	62.3ft
Maximum beam	5.70m	18.7ft
Displacement	46,604kg	102,744lb



MAIN DIMENSIONS 85CS

Length overall	25.82m	84.7ft
Length waterline	23.17m	76.02ft
Maximum beam	6.40m	21ft
Displacement	53,900kg	118,830lb



MAIN DIMENSIONS 52MC FASTLANE

Length overall	15.93m	52.26ft
Length waterline	14.60m	47.9ft
Maximum beam	4.60m	15.09ft
Displacement	16,600kg	36,596lb
Maximum height above waterline	2.88m	9.45ft



MAIN DIMENSIONS 52MC FLYBRIDGE

Length overall	15.93m	52.26ft
Length waterline	14.60m	47.9ft
Maximum beam	4.60m	15.09ft
Displacement	18,450kg	40,675lb
Maximum height above waterline	3.74m	12.27ft



MAIN DIMENSIONS 52MC OPEN T-TOP

Length overall	15.93m	52.26ft
Length waterline	14.60m	47.9ft
Maximum beam	4.60m	15.09ft